

## Standard Chip Resistors

Type: CRS

Sizes: 0504, 0603, 0805, 1206


### Features:

- Chip Resistors in thick film technology
- Resistance element glass-passivated
- Contact areas Nickel-barrier / matte tin
- RF-versions untrimmed
- Resistance values up to 500 M $\Omega$
- Working voltage up to 600 Volts
- Suitable for high vacuum applications – no organics



### Dimensions:

Size	L	B	D	C
0504	1.25 <sup>+0.15/-0.05</sup>	1.0 <sup>+0.15/-0.05</sup>	0.3 <sup>+0.15/-0.05</sup>	0.2 <sup>+0.2/-0.1</sup>
0603	1.5 <sup>+0.15/-0.05</sup>	0.8 <sup>+0.15/-0.05</sup>	0.4 <sup>+0.15/-0.05</sup>	0.2 <sup>+0.2/-0.1</sup>
0805	2.0 <sup>+0.15/-0.05</sup>	1.25 <sup>+0.15/-0.05</sup>	0.4 <sup>+0.15/-0.05</sup>	0.3 <sup>+0.2/-0.1</sup>
1206	3.2 <sup>+0.15/-0.05</sup>	1.5 <sup>+0.2/-0.05</sup>	0.4 <sup>+0.15/-0.05</sup>	0.3 <sup>+0.2/-0.1</sup>

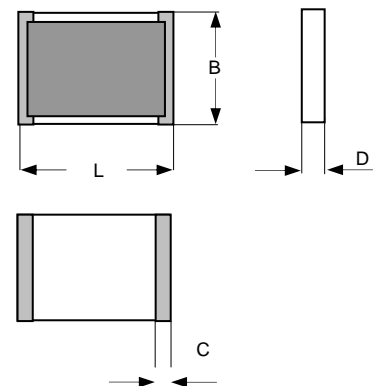

L = Length, B = Width, D = Thickness, C = Width of wrap around (in mm)  
Larger sizes on request

### Packaging:

Bulk in plastic bags – minimum quantity 100 pieces per value  
Blistertape acc. to EN 60286-3 – minimum 1000 pieces per value  
Reel diameter 180 mm or 330 mm

### Ordering Data:

Type – value – tolerance – TCR – packaging

Example: CRS 0805 100K  $\pm$  1% - TCR 100 Tape 180 mm

Untrimmed parts are indicated by the extension "NA" in the order code:

Type – value – tolerance – NA – TCR - packaging

Example: CRS 0805 100K  $\pm$  10% NA TCR 100 Tape 180 mm

If no requirements for TCR and taping are given the standard value (highest value in table) will be supplied and packaging is bulk.

Issue 05-2009

## Standard Chip Resistors Type: CRS Sizes: 0504, 0603, 0805, 1206

### Technical data – depending on size:

Size	0504	0603	0805	1206
Power rating $P_{70}$ (mW) ( $P_{155} = 0$ mW)	100	100	125	250
Working voltage $U_{-}$ , $U_{\text{eff}}$ (V) trimmed untrimmed (Tol. $\geq 5\%$ )	50 150	75 200	100 300	200 600

Ranges / Tolerances / TCR <sup>1)</sup>				
0R1 – <1R	–	10/20% TC250	5/10/20% TC250	5/10/20% TC250
1R – <10R	5/10/20% TC100/250	5/10/20% TC100/250	2/5/10/20% TC100/250	2/5/10/20% TC100/250
10R – <100R	2/5/10% TC100	1/2/5/10% TC100	1/2/5/10% TC50/100	1/2/5/10% TC50/100
100R – 1M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>1M – 10M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>10M – 100M	2/5/10/20% TC100/250	1/.../20% TC50/100	0.5/.../20% TC50/100	0.5/.../20% TC50/100
>100M – 500M	–	5/.../20% TC100/250	2/.../20% TC100/250	2/.../20% TC100/250

<sup>1)</sup> TC 50: Temperature range + 25°C...+ 125°C

Zero-Ohm-Jumper: < 50 mOhm

Sizes 0805/1206: TCR 25 is available as special product (range 1M – 100M only)

### Technical data – general:

Temperature range	-55°C ... +155°C
Climatic category acc. to EN 60068-1	55/155/56
Solderability acc EN 60068-2-58 (lead free and lead-containing)	250°C, 3s
Max. soldering temperature acc. EN 60068-2-58	260°C, 10s

Long term stability	10R – 100M	< 10R / > 100M
Storage 125°C/1000h	< 0.5%	< 1%
Storage 155°C/1000h	< 1%	< 2%
Load $P_{70}$ /70°C/1000h	< 0.5%	< 1%
Short term overload	< 0.25%	< 0.5%
Damp heat (56d/40°C/96%)	< 0.5%	< 1%

Data not specified according EN 140401-802 (CECC 40401-802)

Specifications subject to change without notice

Issue 05-2009

**SRT Resistor Technology GmbH**  
Ostlandstr. 31  
D-90556 Cadolzburg  
Germany

Fon: +49 (0)9103 / 7952-0  
Fax: +49 (0)9103 / 5128  
E-mail: info@srt-restech.de  
Internet: www.srt-restech.de